


USER MANUAL

PROJECTION SCREEN

S901、S902、S903

1.Packing list


After unpacking the packing box, please check whether the product appearance is intact, and count all accessories. If there is any defect, please contact the dealer!

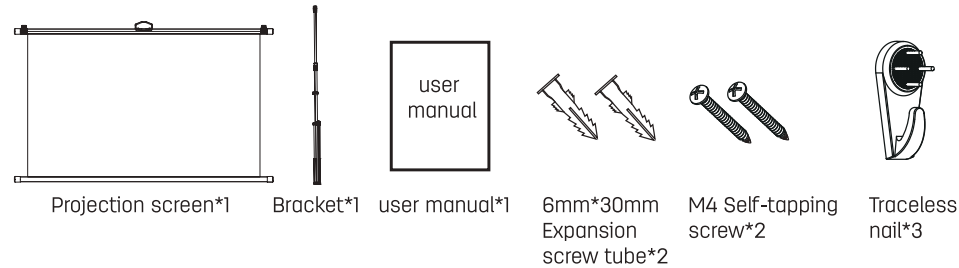

2.Installation method

Support placement


- 1.Take the bracket out of the package, unscrew the lock catch (as shown in Figure 1), move the bracket leg down about 17cm, lock the lock catch, and place it at the planned projection position.
- 2.Expand the screen, and hang the middle hook at the top of the screen in the hook clamp at the top of the bracket (as shown in Figure 2). Unscrew the deviation knob (as shown in Fig) Adjust the screen height as required, and then tighten the height knob.
- 3.Fix the lower rod of the screen in the fixed slot of the lower rod (as shown in Figure 4), unscrew the fixed slot knob, adjust the height of the fixed slot, make the screen fully unfold, and then tighten the fixed slot knob of the lower rod.

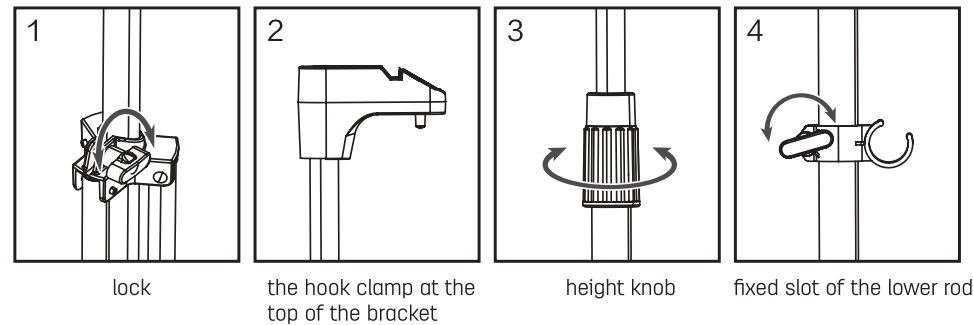

Hanging arrangement1


1. Measure the distance between the centers of two lifting rings of the screen, and mark the drilling position at the same horizontal height on the wall according to the distance between the centers.
2. Use $\phi 6$ electric drill. The electric drill shall punch holes at the hole location marked on the wall, use a hammer to drive the expansion screw into the hole already punched, use a screwdriver to screw the tapping screw into the expansion screw, and the tapping screw shall be 10mm above the wall.
3. Hang the hanging rings at both ends of the curtain on the screws installed on the wall, as shown in the following figure.

Note: The plastic lifting ring can be moved, please adjust the position of the lifting ring by yourself

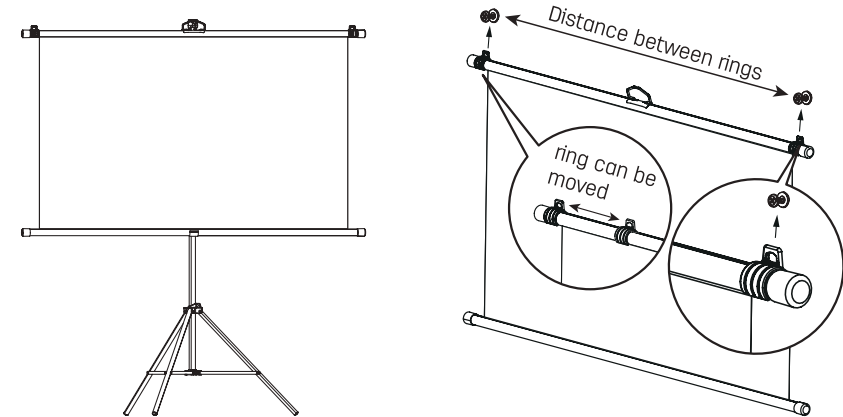

Hanging arrangement2

1. Measure the center distance between two lifting rings of the screen. (As shown in Figure 1)
 2. Mark two traceless nails at the same horizontal height on the wall. (As shown in Figure 2)
 3. Drive the traceless nails into the wall marking position, and the nail needle is exposed about 3mm. (As shown in Figure 3)
 4. Hang the lifting ring on the traceless nails installed on the wall. (As shown in Figure 4)
- Note: The plastic lifting ring can be moved, please adjust the position of the lifting ring by yourself

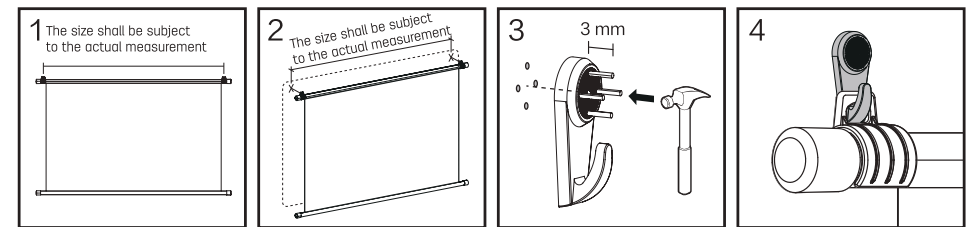

3.maintain

- 1.The screen shall be kept away from strong wind to avoid damage caused by wind pulling.
- 2.Avoid direct sunlight or rain to slow down the aging of the curtain.
- 3.During the unfolding of the screen, do not pull it with force, and try to use force evenly and vertically.
- 4.Do not touch the screen surface with sharp objects to avoid damaging the screen.
- 5.In the process of using and rewinding, if the curtain surface is found to have transverse lines, it can be restored after hanging on the wall for 3-5.

Warm prompt: Before you use this product, please read this manual carefully and operate this product according to the steps in the manual.

CERTIFICATE OF QUALIFICATION

Inspector: _____

Date of manufacture: _____

DELI GROUP CO., LTD.

301 Xuxiake Ave. Ninghai County
Ningbo 315600 China Made in China
info@nbdeli.com www.deliworld.com



KEEP FOR FUTURE USE

Version: 1.0
Date: 01-2023